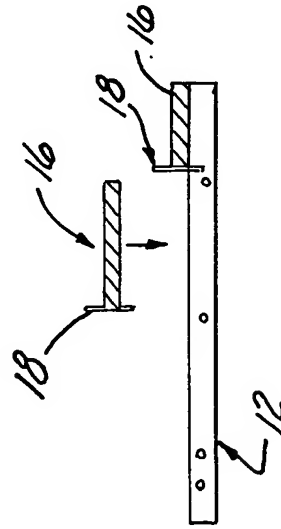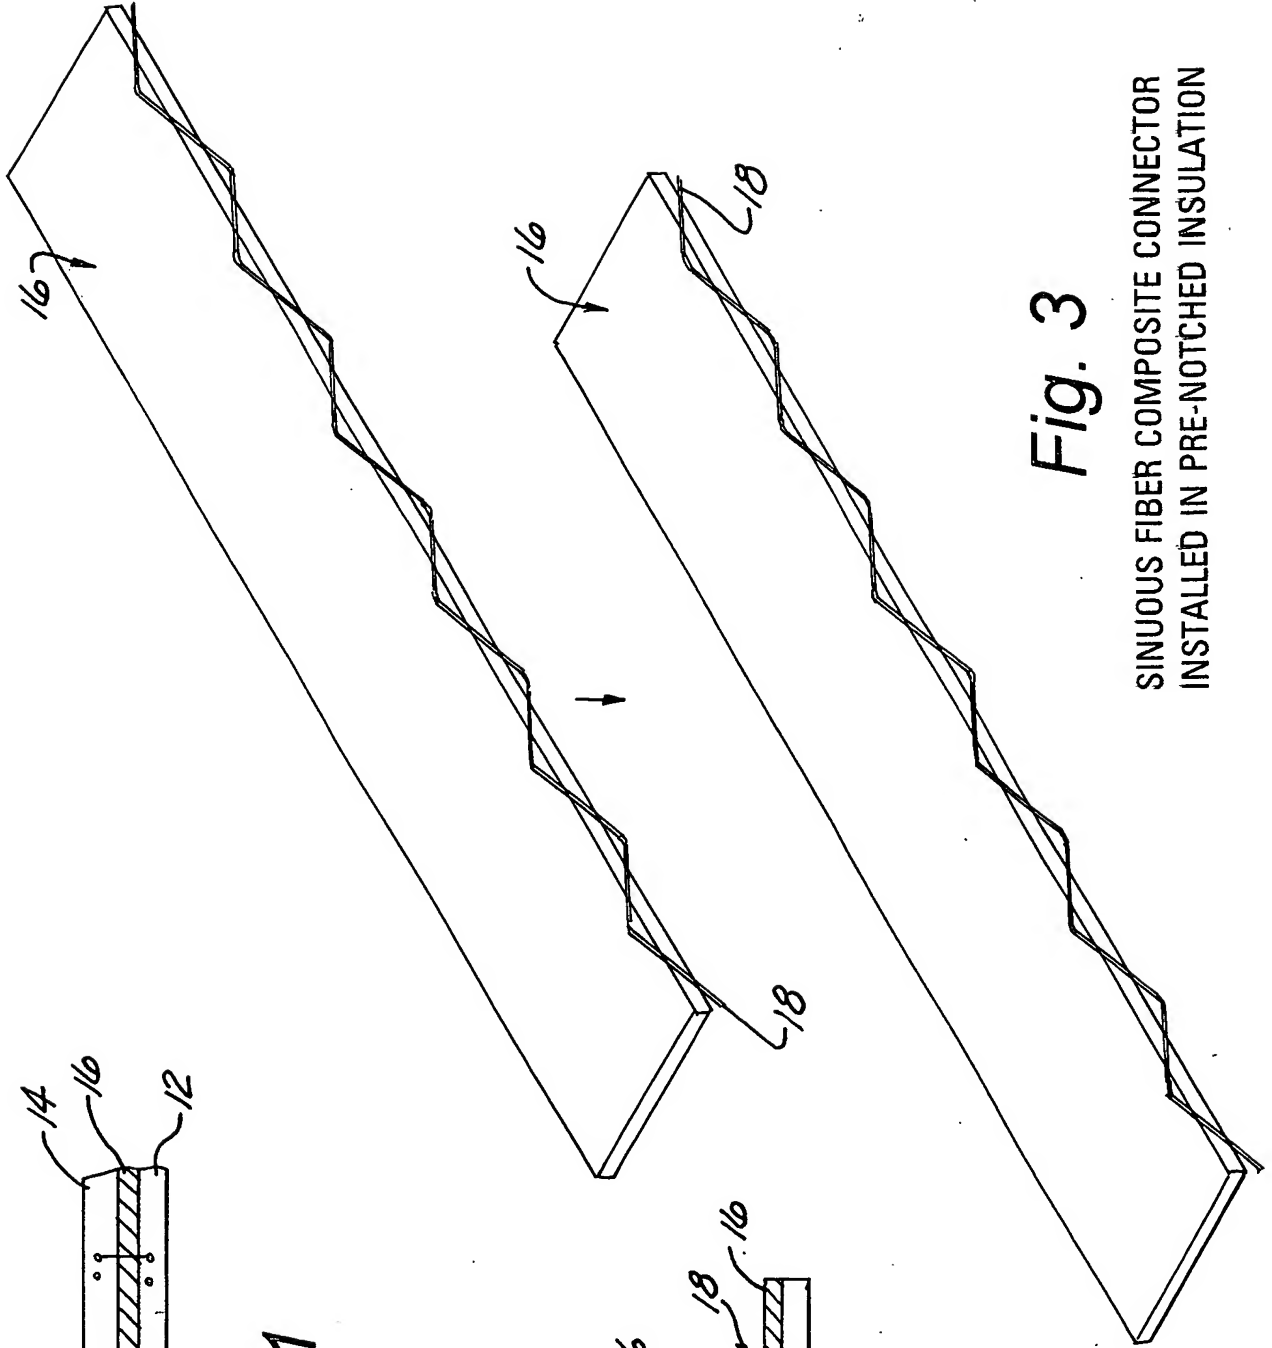Fig. 3

SINUOUS FIBER COMPOSITE CONNECTOR
INSTALLED IN PRE-NOTCHED INSULATION

Fig. 1

Fig. 2
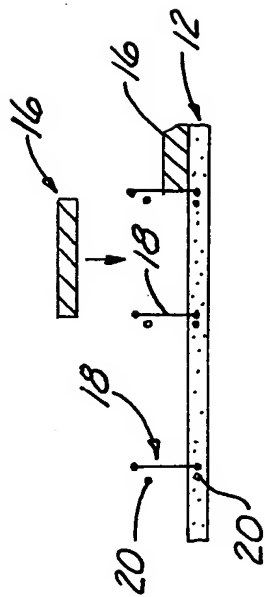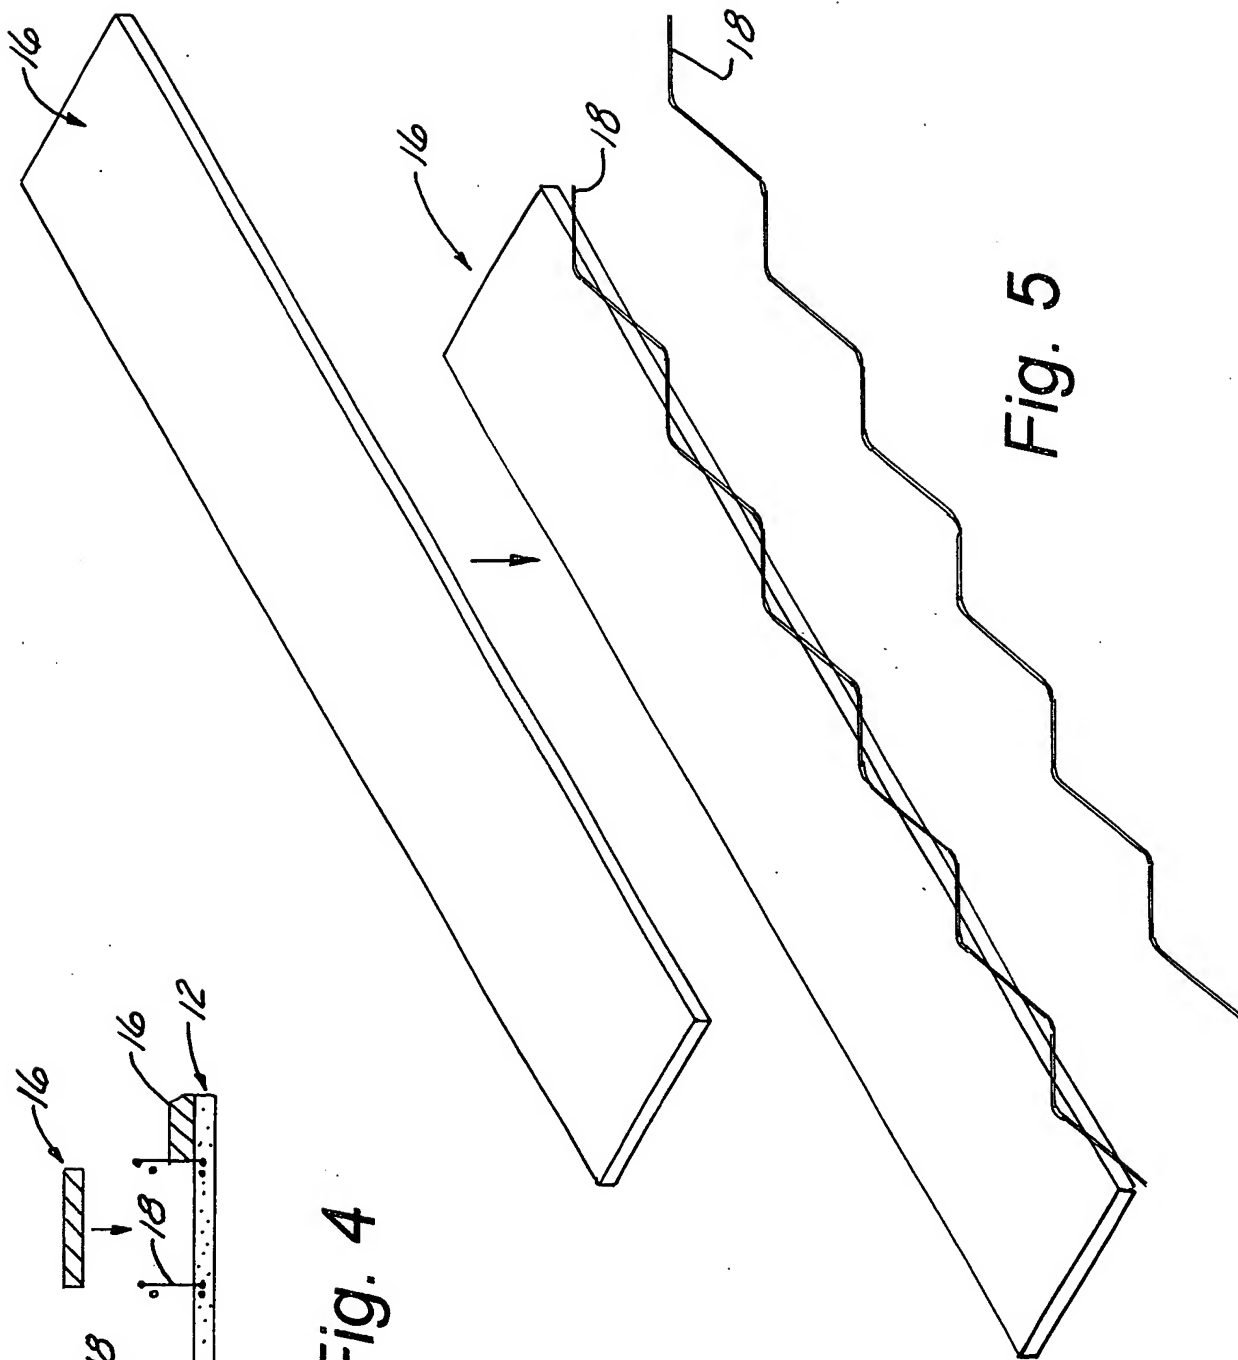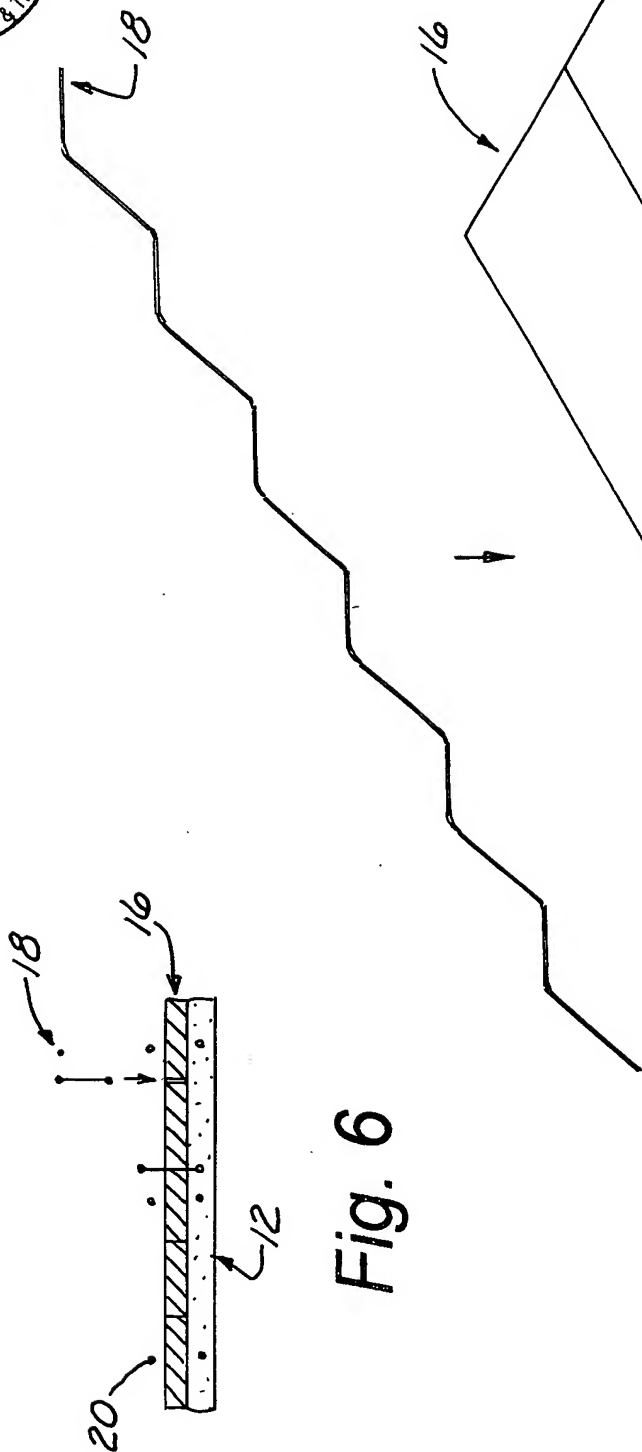
16

16

18

18

Fig. 5

16

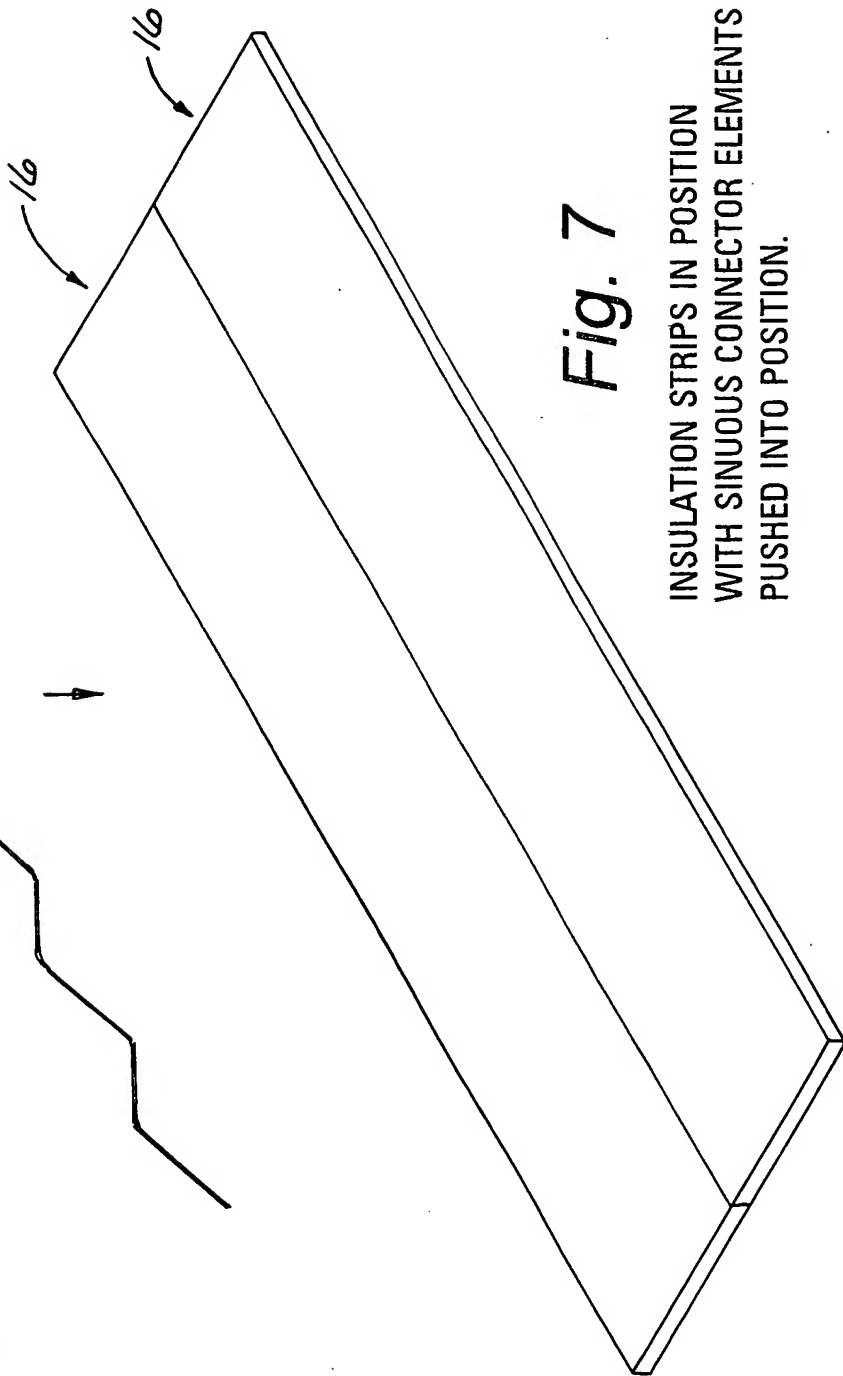16

18

12

18

18

20

20

20

20

Fig. 4

18

16

16

16

Fig. 7

INSULATION STRIPS IN POSITION
WITH SINUOUS CONNECTOR ELEMENTS
PUSHED INTO POSITION.
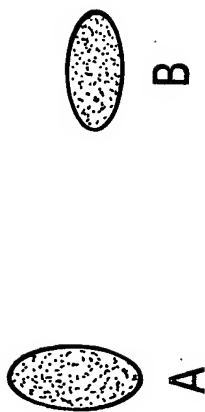
18

16

20

12

Fig. 6
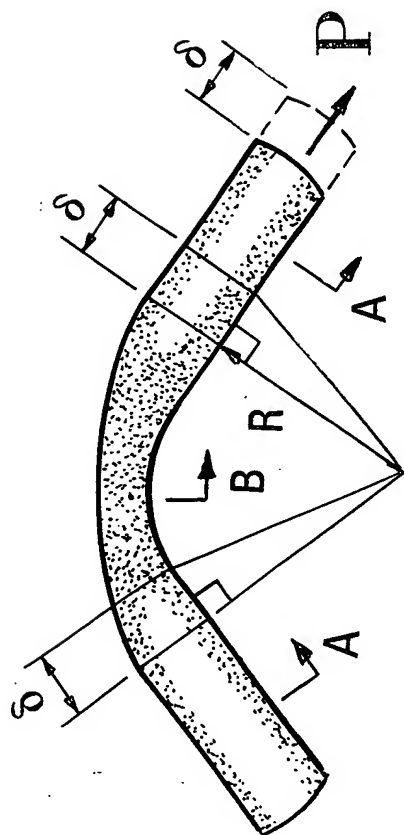
$$W_E = P\delta$$

$$W_I = \frac{2M\delta}{R}$$

$$W_E = W_I$$

$$\therefore P = \frac{2M}{R}$$

Fig. 8

BEND EFFECTS ON ANCHORAGE
AND PROFILE